



▶▶ NEUMANN.BERLIN

## ▶ NDH 30

OPEN DYNAMIC HEADPHONE

### Quick Guide

Kurzanleitung  
Guide rapide  
Guida rapida  
Guía de inicio rápido  
Pikaohje  
Γρήγορος οδηγός  
Kısa Kılavuz  
Краткая инструкция

### Guia rápido

Beknopte handleiding  
Krótka instrukcja obsługi  
Snabbguide  
Kort vejledning  
快速指南  
クイックガイド  
퀵 가이드



PUBL. 02/22 - 592814/A03

GEORG NEUMANN GMBH · LEIPZIGER STR. 112 · 10117 BERLIN · GERMANY  
TEL +49 (0)30 / 41 77 24 -0 · FAX -50  
HEADOFFICE@NEUMANN.COM · WWW.NEUMANN.COM



Quick guide

Safety guide

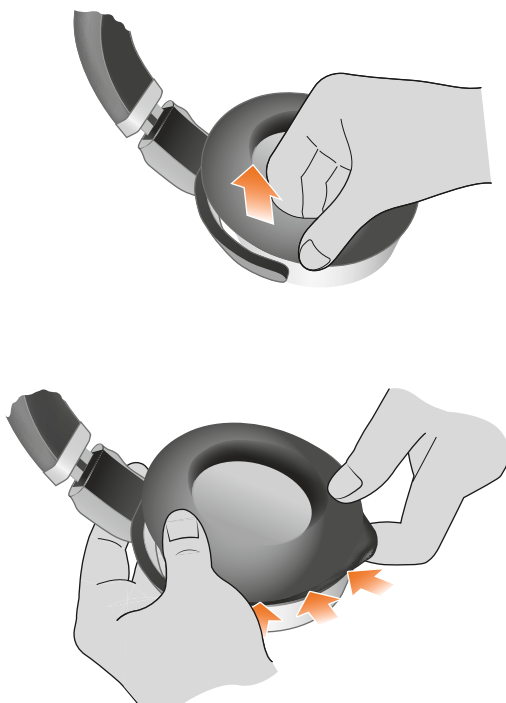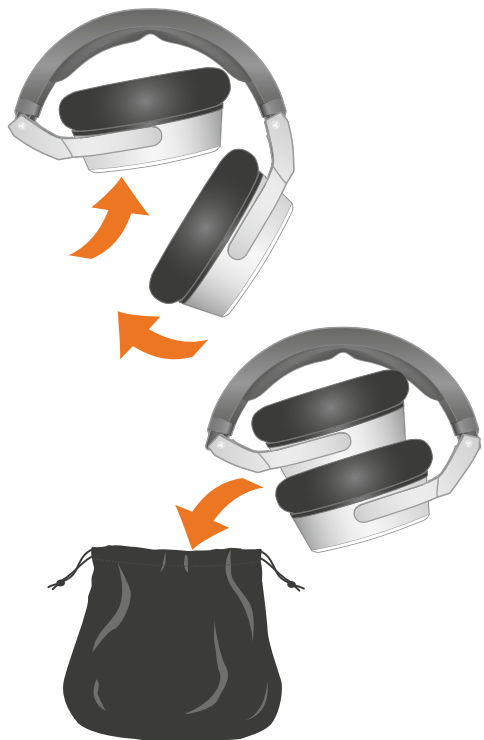

### Specifications

Ear coupling	Circumaural
Acoustic principle	Open back
Transducer	38 mm dynamic driver with neodymium magnet
Impedance	120 Ω
Frequency range	12 Hz - 34 kHz [-3 dB]
Peak power handling	1000 mW
Continuous power handling	200 mW
Sound pressure level	104 dB SPL [1 kHz, 1 Vrms]
Total harmonic distortion (THD)	< 0.03 % [1 kHz, 100 dB SPL]
Magnetic field strength	4 mT
Weight	352 g (without cable)

### Environmental conditions

Operating temperature	+5 °C to +45 °C (41 °F to 113 °F)
Storage temperature	-15 °C to +70 °C (5 °F to 158 °F)
Relative humidity	≤ 90 %